

Investigating the effectiveness of the Building's envelope materials in hot and arid climates to achieve indoor thermal comfort

Khaled Mansouri ^{*}, Sriti Leila ²

^{1&2}Architecture Department/ Laboratory of Design and Modeling of Architectural Forms and Ambiances (LACOMOFA),
Mohamed Khider University, BP 145 RP, Biskra, 07000, Algeria

^{*}(mansourikhaled7@gmail.com)

(Received: 31 July 2023, Accepted: 09 August 2023)

(1st International Conference on Modern and Advanced Research ICMAR 2023, July 29-31, 2023)

ATIF/REFERENCE: Mansouri, K. & Leila, S. (2023). Investigating the effectiveness of the Building's envelope materials in hot and arid climates to achieve indoor thermal comfort. *International Journal of Advanced Natural Sciences and Engineering Researches*, 7(7), 120-127.

Abstract – Envelope Building materials play an important role in architecture by providing protection necessities, comfort, and technical performance while promoting an architectural language and an image. The building envelope represents all the surfaces of a space, which consist of opaque parts such as walls, floors and roofs and transparent parts such as windows and openings. The building envelope is the partition between the external and internal environment of the building which influences the heat transfer between the two environments so it has a direct impact on the thermal comfort sensation which also influences the energy consumptions. This research focuses on the opaque building materials of the envelope and their contribution in the thermal comfort and the energy consumption; an investigation of the impact and the thermal behavior of different envelope configuration materials under the climatic conditions of Biskra was carried, Algeria a hot and arid climate. The thermal performance of different materials was compared using in situ measurement using “Testo 480” a hygrothermal scale and by analyzing the results of a different simulation using “DesignBuilder v5.5” to perform a thermal and energy analysis. The results show that choosing a multilayered isolated envelope such as double red brick isolated wall will likely affect positively the level of the indoor thermal comfort.

Keywords – Envelope, Building Materials, Thermal Comfort, Energy Consumption, Hot and Dry Climate.

I. INTRODUCTION

In the last centuries, the world confronted a substantial development movement that touched all aspects of life, a great part of concepts has changed, hence the concept of architecture has changed from the art of building to a plastic practice in another word the focus has shifted to the image and the aesthetic of the building rather than the environmental aspect which has disregarded, Therefore the world now is facing a double challenge: first, the problem of security of energy supply and, the fight against climate change

[1]. Energy consumption is one of the world's problems, which is the result of the environmental damages caused by the irrational consumption of energy. In addition, the global energy crisis has made the world less inclined to seek alternative sources. The energy consumption of the building falls under the many adaptation needs of users from the air conditioning, heating ventilation and lighting using HVAC systems in order to reach the comfort of the user, as a result *buildings are accounted for about 40 % of the global energy use* [2]. As stated by Ould-Henia [3], the new

architectural models produced in Algeria during the last decades which they called modern constructions are more energy consumers, less adaptable to their environment and regarding the climatic aspect. Thermal comfort is a requirement for the user within the space, hence resorting to the use of HVAC systems become a necessity for the user in order to reach and ensure his comfort which leads to an increase in the energy consumption, it's up to the architect during the design phase to reach the limits of thermal comfort in a passive ways which can only be achieved through a good understanding of the climatic conditions and the environmental context for a good integration of the building in its location, thus contribute to reducing the energy consumption of the building. In hot and dry climates *context* energy required in the building goes towards providing thermal comfort, especially in summer's sessions thus it's possible by a passive architectural disposition, techniques and a good choice of building materials [3]. According to Gezer [4], Achieving thermal comfort in a building starts with the knowledge of the climate in question and passive strategies to control this climate in order to provide the right design approaches for maintaining comfort. The selection of envelope building materials is the major and prime control in maintaining the thermal comfort of occupants. The building envelope is the barrier between the interior and exterior of the building; therefore it plays an important role in controlling the climatic factors, either by benefiting or protecting from them in order to reach thermal comfort. The Studies have shown that the effect of the envelope material it is due to their thermal and physical properties which determine the thermal efficiency of the materials. Building envelope materials are one of the elements of the building that influences directly indoor thermal comfort because it is a barrier between two environments; the inside and the outside thus it plays an important role in controlling climatic factors [4]. Many researches has found that the impact of building envelope materials on thermal comfort and heat transfer is due to its *thermo-physical* characteristics, according to Givoni [5] thermo-physical properties have to be considered while choosing a building material and decrement factor should be taken into account. He emphasizes the combined effect of material properties and color. The thermal resistance of the materials plays an

important role in heat flow and increasing the total thermal resistance the envelope; a wall or a roof by reducing the heat flow through the building. Therefore this research investigates how to achieve thermal comfort in a hot climate by making the right choice of envelope materials that resist and work well with this type of climate conditions.

A. Indoor Thermal Comfort

Thermal comfort is a necessity in the indoor space since users are spending the majority of their time indoors, it become an obligation for architects and technicians to achieve it with their design, which has spawned large studies in the scientific literature to define thermal comfort. According to Givoni [5], thermal comfort is a state of thermal balance between the human body and his environment also is the Conditions for which the body's self-regulation mechanisms are at a minimum level of activity. In the Norm "EN ISO, 7730" [6], Thermal comfort is often defined by the satisfaction expressed with the thermal environment. In the ASHRAE Handbook [7] it is defined According to Moudjalled [8] as the difference between these definitions is according to the aspect taken into consideration; the physiological, sensory and psychological aspect, he mentioned that the concept of thermal comfort depends on the physical context and the individual characteristics," It is a dynamic adaptive process that integrates the different physical, physiological and psychological mechanisms".

B. Comfort and Energy Consumption

Buildings account for about 40% of the global energy consumption that is used to ensure users comfort (Yang et al, 2014) [9]. The building energy requirement generally is the amount of energy needed to maintain a suitable indoor climate for a given period of time. This concern has led to a number of studies conducted worldwide to improve building energy efficiency. Frontczak (2011) [10] has found in a survey of indoor environmental conditions that thermal comfort is ranked by building occupants to be the most important compared with visual and acoustic comfort and indoor air quality, it's the most

influencing factor in building energy consumptions. According to Yang (2013) [11], a significant proportion of the increase in energy use was due to the spread of the HVAC installations in response to the growing demand for better thermal comfort within the built environment. In general, in developed countries HVAC is the largest energy consumers, accounting for about half of the total energy consumption. In Algeria, the building sector residential and tertiary account for about 41 % of the final energy consumption According to the National Agency for the Promotion and Rational Use of Energy APARUE. Figure 1 shows Algeria's final energy consumption by sector, the building sector is the most energy consuming sector in Algeria, as a consequence of the absence of comfort and the inadaptability of buildings.

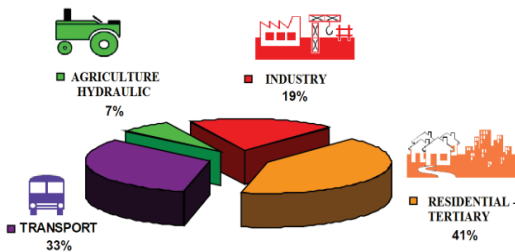


Fig 1. The Final energy consumption by sector in Algeria, APARUE 2009[12]

C. Building Envelope

The building envelope is the physical barrier between the exterior and interior environments. Building envelope represents all the surfaces of a space, which consist of opaque parts: walls, floors and roofs and transparent parts: windows and openings, it is the partition between the external and internal environment of a building which influences the heat transfer between the two environments. Generally, the building envelope is comprised of a series of components and systems that protect the interior space from the environmental effects as shown in figure 2.

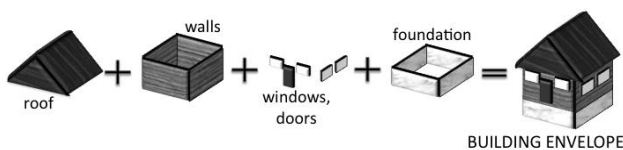


Fig 2. The component of the building envelope

The building envelope includes the materials that comprise the foundation, wall assembly, roofing systems, glazing, door, and all other penetration areas.

D. Building envelope and thermal comfort

In buildings, indoor thermal comfort depends on its envelope materials components and their physical properties and thermal such as resistance, conductivity, these thermo-physical properties determine the climatic response of the envelope. [13]. Balaji's study [14] found that, in order to reduce the energy consumption in the building, it is necessary to understand the thermal performance of the building envelope on the indoor environment, he points out that most studies have found that time lag and decrement factor are the most critical performance measures of a building envelope that influence heat transfer and the indoor temperature. Envelope design characteristics affect the thermal comfort of the occupants, as well as energy consumption in the building. As such, according to Bakhlah (2015) [15], in a hot and dry climate context, a proper passive design of building envelope can influence directly the outdoor condition, by reducing the heat gain transfer, indoor air temperature, and improving the indoor thermal condition and reducing the need for HVAC systems, which will reduce energy consumption. Choosing building materials is essential solutions that can guarantee to maintain the comfortable conditions inside the building in all seasons, In other word choosing building envelope materials is a passive strategy that may help to ensure indoor thermal comfort. Indoor thermal comfort can be achieved through the understanding of the thermal performance of the building envelope in relation to its environment [16]. The indoor ambiance temperature depends directly on the materials that compose the envelope (Walls, Roofs, and Widows) and their properties and how they affect heat transfer through the materials, Primary heat transport modes are: conduction, convection, and radiation as shown in figure 3

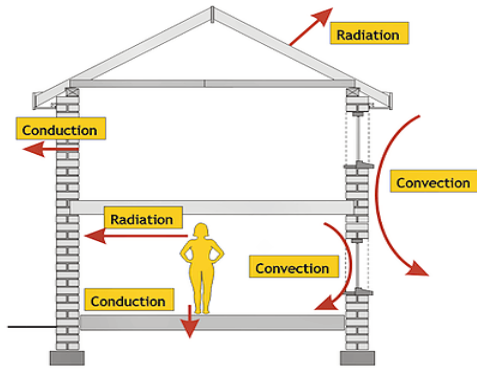


Fig 3. Heat transfer modes through the building envelope

The roof is responsible for 70.62% of the gains received while 27.11% of the thermal gains are transmitted by the four facades and 2.27% by the windows [13]. A judicious treatment of the walls of the envelope according to the warm and arid climatic conditions (choice of construction materials with high thermal inertia for walls and roofing, reduction of the dimensions of windows, solar protections ... etc.) allows to guarantee an optimal comfort inside the building, even if the outside conditions are unfavorable .

II. THE CASE STUDY

In this study, an investigation of the effect of envelope building materials on thermal comfort took place to investigate the impact of different components of opaque part of the building envelope (wall, roofs, and insulations) of apartment buildings in the hot and dry climatic context of the city of Biskra.

A. Case of the City of Biskra: the Climatic Characteristics

The city of Biskra is a Saharan city, it has a high rate of solar radiation, it is located in the south-east of Algeria as shows the Figure 4; it is characterized by a cold winter and a hot dry summer, the city is characterized by a maximum temperature in summers which reaches in the month of July 45 (C°), and a minimum temperature in winter that reaches 5 ° C during the month of January, with a rare level of precipitation (less than 30 days per year), The average relative humidity is low around 47%, with a maximum value of 65% in the month

of December, and a minimum of 28.29% in July and August.

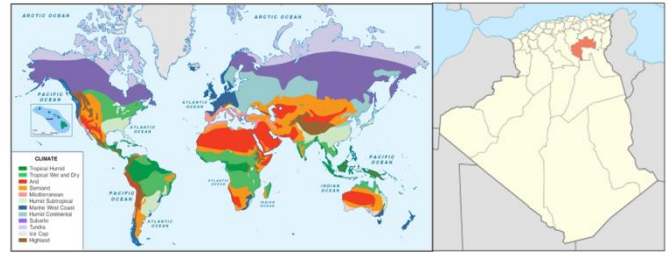


Fig 4. The climatic zone and the geographic position of the city of Biskra

Table 1 summarizes the main climatic data of the chosen city.



Table.1: The Metrological characteristics of Biskra


Temperature (c°)	Relative Humidity (%)
Max Temp: 42 °C in July. Min Temp: 7 °C in January. Average annual Temp: 21.5°C	Max RH: 50% Min RH: 10% Average annual RH: 46%
Precipitations (mm)	Winds (m/s)
Very low rainfall Max: 20 mm/year Average annual 8.8 mm / year	prevailing winds are north-western in winter south-eastern in summer speed of 6 m/s to 10 m/s

B. The chosen buildings

The buildings envelopes that were studied represent the most recurrent and typical envelope (walls, roofs and insulations) types of residential houses and apartments in the city of Biskra. Only the opaque parts of the building envelope were chosen since they are responsible for the majority of heat transfer from the outdoor to the indoor. In this study, different measurements of the temperature and humidity in indoor and outdoor were conducted in three typical rooms in three residential buildings; table 3 shows the three different cases.

Table 3. The chosen buildings envelope compositions

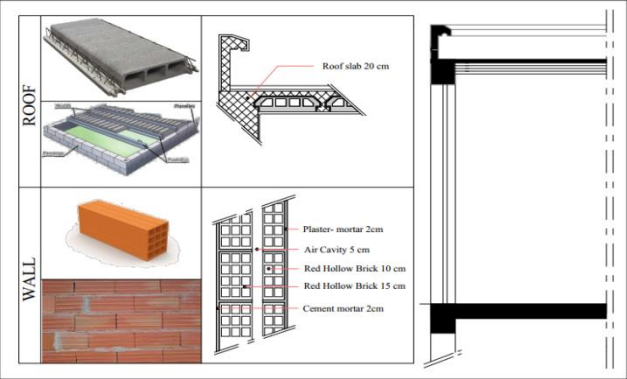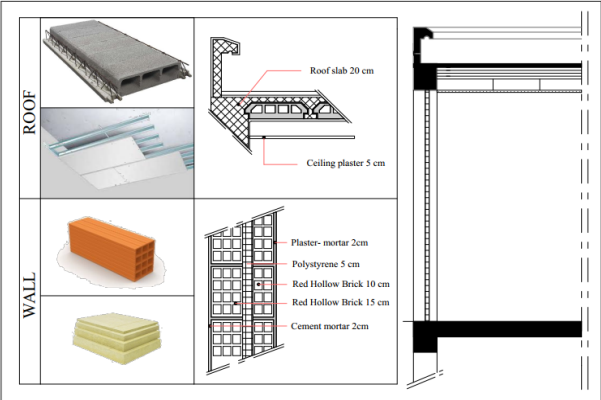Envelope compositions	
Case 1:	
<p>Roof: Hollow Slab 20cm</p> <p>Wall: Double red brick wall Oriented: Est in the ground floor</p>	
	
Case 2:	
<p>Roof: Slab 20cm+ plaster suspending ceiling</p> <p>Wall: Double red brick wall+ polystyrene insulation 5 cm Oriented: Est in the first floor</p>	
	
Case 3:	

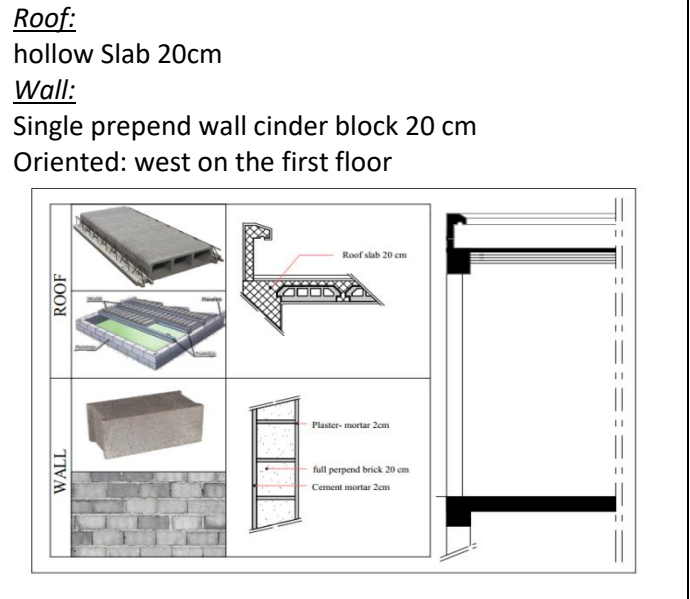

III. METHODS AND MATERIALS

In this study, a quantitative method was conducted to evaluate indoor thermal conditions using in situ measurements and numerical simulations.

C. The measurements protocol

Different *In situ* measurement was conducted; indoor and outdoor measurement of air temperature, relative humidity, and surface temperature, using a hygrothermal instrument Testo 480 as shown in figure 5.



Fig 5. The Measuring instrument TESTO 480

The measures of the ambient and surface temperature and the relative humidity were conducted in surfaces of a wall inside and outside surface as shown in figure 6.

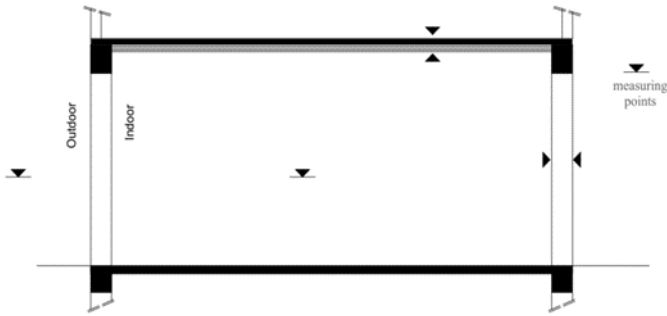


Fig 6. The Measuring positions of the chosen parameters

Bi hourly measurements were made under natural conditions without any type of active systems from (8.00 am to 22.00 pm) in a single day the 28th of March (a mild day).

D. The simulations protocol

In order to evaluate the thermal comfort, a numerical simulation was conducted with "DesignBuilder 5.5" software. DesignBuilder is a tool for dynamic thermal simulation and energy consumption analysis of buildings. The model of the studied Buildings and envelope compositions simulated with DesignBuilder based on actual weather conditions (climatic weather data file).

The figure 7 shows the modeled case in DesignBuilder.

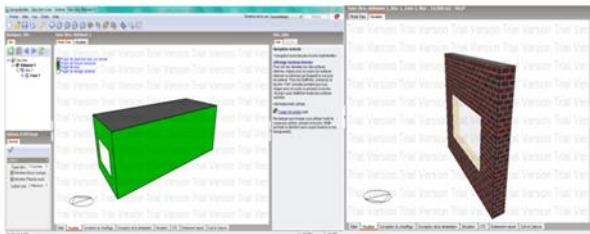


Fig 7. The modeled case in DesignBuilder

- An annual simulation was conducted;
- The simulation was conducted natural conditions the mechanical systems were inactive (ventilation, air conditioning);
- Ambient and operative temperature simulation were conducted;
- Three cases of the building were modeled and simulated (envelope and materials).

IV. RESULTS DISCUSSION

A. Measurement results

1) The Ambient Temperature (T_a)

The graph Figure 8 shows the results of the measured ambient air temperature inside the 3 cases.

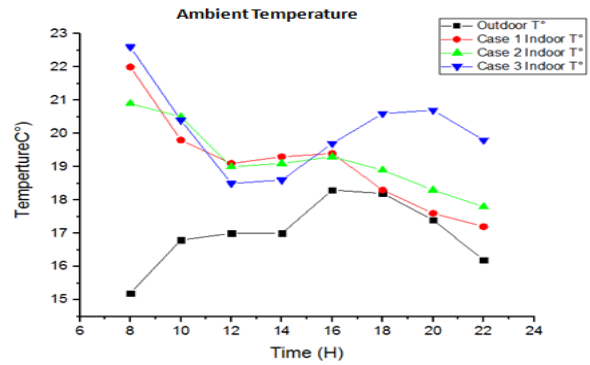


Fig 8. The ambient Temperature measured in the 3 cases

The graphs show that in the same outdoor temperature condition there is different indoor temperature this is due to the different envelope compositions, thickness and thermal properties, in case 1 and 2 where the walls are thicker and more resistant we noticed that the indoor temperature (T_a) is more stable with a gap of 4 C° than case 3. The indoor ambient temperature is higher than the outdoor air temperature; this is due to the cumulative heat throughout the day and the high thermal mass of the used wall materials that keep the heat accumulated.

2) Wall surface temperature (radiant temperature)

The graph Figure 9 shows the results of the measured surface temperature of the 3 cases envelope walls.

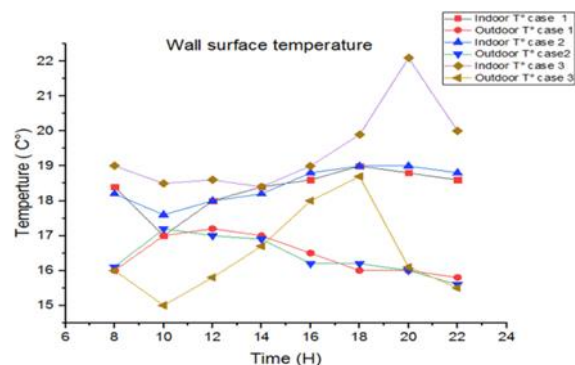


Fig 9. The wall surface (Ts) Temperature measured in the 3 cases

The graph shows the results of the measured indoor and outdoor wall surfaces temperatures of the 3 cases. As it noticed from the graph, in case 1 and 2 the indoor surface temperatures are close and almost stable throughout the day with an average lag of 3 C° due to the effect of thermal inertia. The external surface temperature depends directly on the sun exposure and radiation, as a result, the internal surface temperature depends on the wall compositions materials and their thermal properties to conduct accumulate and resist with influence the indoor ambient temperatures. Thus the heat gained by the walls is stored inside the various layers of the envelope.

3) Roof surface temperature (radiant temperature)

The graph Figure 10 shows the results of the measured surface temperature of the 3 cases envelope roofs.

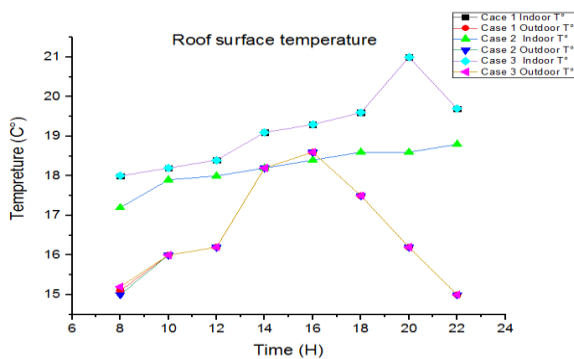


Fig 10. The Roof surface (Ts) Temperature measured in the 3 cases

The graph in Figure 10 shows the results of the measured indoor and outdoor roof surfaces temperatures of the 3 cases. The difference is between case 1 and 3 with a standard roof cement slab en hollow bricks 20cm and case 2 with a plaster suspended ceiling from the result we can notice that adding the suspended plaster ceiling helps on reducing heat transfer from the outside to the inside ambience.

B. Simulations results

The figure 11 presents the simulations results of the indoor air temperatures simulated in the three cases.

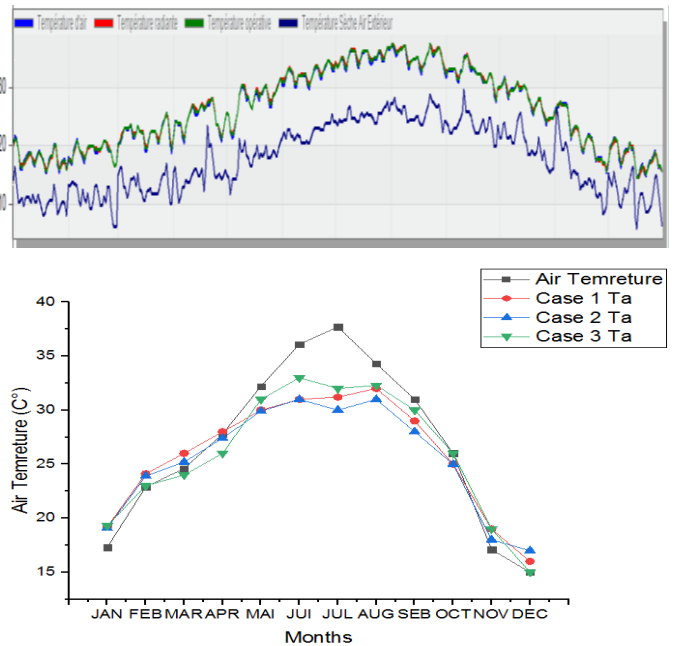


Fig 11. Simulation results of Temperature measured in the 3 cases

From the simulation results, we can notice that different envelope materials result in the different ambience and surface temperature which means the building envelope effect directly the indoor thermal ambience sensation that affect energy consumption.

V. CONCLUSION

This study shows the impact of building envelope on indoor thermal comfort which is evaluated by ambient and surface radiant temperature with different envelope building materials in a hot and dry climatic context of the city of Biskra .the study demonstrates the essential results of an empirical study that have been done using in situ measurements as well as numerical simulations, also it reveals the importance of the building wall configuration. To achieve a better thermal performance of the envelope, it is desirable to have a multi-layered envelope comprising materials of different thermo-physical properties which allow regulating heat exchanges between the building and its environment, a double red brick wall with

isolation is efficient to ensure thermal comfort due to his thermo-physical properties, thus A bad choice of the material constituting the building envelope can result in a long-term additional cost to ensure thermal comfort. In general, the study has shown that choosing a multilayered isolated envelope will likely affect positively the level of the indoor thermal comfort.

REFERENCES

- [1] Thiers, S., & Peuportier, B. (2008). Thermal and environmental assessment of a passive building equipped with an earth-to-air heat exchanger in France. *Solar Energy*, 82(9), 820–831. <https://doi.org/10.1016/j.solener.2008.02.014>
- [2] Kolokotsa, D., Diakaki, C., Grigoroudis, E., Stavrakakis, G., & Kalaitzakis, K. (2009). Decision support methodologies on the energy efficiency and energy management in buildings. *Advances in Building Energy Research*, 3(1), 121–146. <https://doi.org/10.3763/aber.2009.0305>
- [3] Ould-Henia, A. (2003). Climatic and construction choices, arid and semi-arid zones: the courtyard house of Boussaâda (in french) Doctoral dissertation, Federal Institute of Technology Lausanne ,Swiss.
- [4] Gezer, N.A. (2003). The Effects of Construction Materials On Thermal Comfort In Residential Buildings; an Analysis Using Ecotect 5.0 (Doctoral dissertation, METU). https://www.academia.edu/11953883/THE_EFFECTS_OF_CONSTRUCTION_MATERIALS_ON_THERMAL_COMFORT_IN_RESIDENTIAL_BUILDINGS_AN_ANALYSIS_USING_ECOTECT_5.0
- [5] Givoni, B. (1978) *L'homme l'architecture et le climat*. Editions Le Moniteur, Paris, France.
- [6] ISO7730 (2005). 'ISO 7730: Ergonomics of the thermal environment. Analytical determination and interpretation of thermal comfort using calculation of the PMV and PPD indices and local thermal comfort criteria', Management, 3, pp. 605–615. Available at: <http://linkinghub.elsevier.com/retrieve/pii/S0267726105000503>
- [7] American Society of Heating, Refrigerating and Air-Conditioning Engineers (Ed.). (2012). *Thermal guidelines for data processing environments* (3rd ed). Atlanta, GA: ASHRAE. https://ecoinfo.cnrs.fr/IMG/pdf/ashrae_2011_thermal_guidelines_data_center.pdf
- [8] Moujalled, B., Cantin, R., & Guarracino, G. (2008). Comparison of thermal comfort algorithms in naturally ventilated office buildings. *Energy and buildings*, 40(12), 2215-2223. <https://doi.org/10.1016/j.enbuild.2008.06.014>
- [9] Yang, L., Lam, J. C., & Tsang, C. L. (2008). Energy performance of building envelopes in different climate zones in China. *Applied Energy*, 85(9), 800–817. <https://doi.org/10.1016/j.apenergy.2007.11.002>
- [10] Frontczak, M., Danmarks Tekniske Universitet, & DTU Byg. (2011). *Human comfort and self-estimated performance in relation to indoor environmental parameters and building features: Ph. D. thesis*. Lyngby: DTU Civil Engineering, Technical University of Denmark. <https://doi.org/10.1016/j.buildenv.2010.10.021>
- [11] Yang, L., Yan, H., & Lam, J. C. (2014). Thermal comfort and building energy consumption implications – A review. *Applied Energy*, 115, 164–173. <https://doi.org/10.1016/j.apenergy.2013.10.062>
- [12] APRUE, (2015). Final energy consumption of Algeria, key figure-year 2015; Ministry of Energy and Mine https://portail.cder.dz/IMG/pdf/Renewable_Energy_and_Energy_Efficiency_Algerian_Program_EN.pdf
- [13] Latreche Sihem, & Sriti Leila. (2018). The Effect Of Building Materials Choice On The Thermal Comfort In The Auto-Produced Individual Housing In Biskra. *Zenodo*. <https://doi.org/10.5281/zenodo.1165204>
- [14] Balaji, N., Mani, M., & Venkatarama Reddy, B. (2013). *Thermal performance of the building walls*. Presented at the Building Simulation Application BSA 2013, 1st IBPSA, Italy conference Bozen-Bolzano. https://www.researchgate.net/profile/Nallaval_Balaji2/publication/235328176_Thermal_Performance_of_the_Building_Walls/links/00b49519c6633c41f7000000.pdf
- [15] Bakhlah, M. S. O. (2015). Building Envelope Design For Indoor Air Temperature in Hot and Dry Climate, Yemen. 57. http://eprints.usm.my/30081/1/BUILDING_ENVELOPE_DESIGN_FOR_INDOOR_AIR_TEMPERATURE.pdf
- [16] Bellahcene, L., Cheknane, A., Bekkouche, Sma., & Sahel, D. (2017). The effect of the thermal inertia on the thermal transfer in building wall. *E3S Web of Conferences*, 22, 00013. <https://doi.org/10.1051/e3sconf/20172200013>